

**halliday
baillie**

HB 2330 Face Fix Kit

For HB 2330 Series Brass D Pulls

HB 2330 19mm Face : Face Fix Kit, HB 2330 Series 19mm Rod

The HB 2330 Face Fix Kit is designed for installation of the HB 2330 Series D Pulls on timber doors only where a pull is required to one side of the door. Please note that the coach screw is 15mm long so a minimum door thickness of 24mm or more is recommended. Kits come with all parts required for mounting, D pulls and roses are sold separately.

Fixing kits for other fixing methods including back to back fix, and glass door, aluminium single side fixing are also available.



Please note all finishes below are unlacquered:

AB : Aged Brass

SB : Satin Brass

PB : Polished Brass

KC : Black Chrome

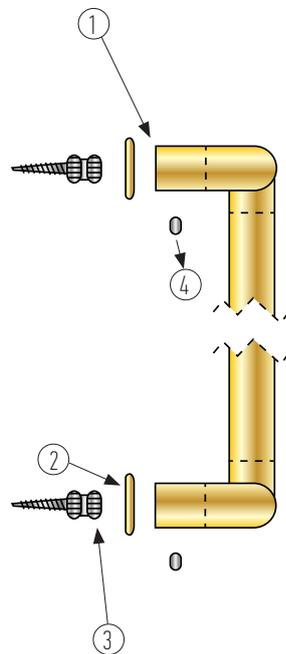


Square Rose

Components for HB 2330 Face Fix Kit

- ① Brass roses (installation is optional)
- ② Hanger bolt (used with adaptor supplied)
- ③ Grub screw

Installation instructions

1. Mark door with the centre to centre measurement appropriate for the D Pull being used.
2. Drill guide holes at centre to centre points if required.
3. Screw coach screw (3) into marked centre points.
4. If brass roses are being used these need to be slid over the threaded rods before placing through the door.
5. Slide D Pull over coach screw fixing inserts and secure in place with grub screws provided.

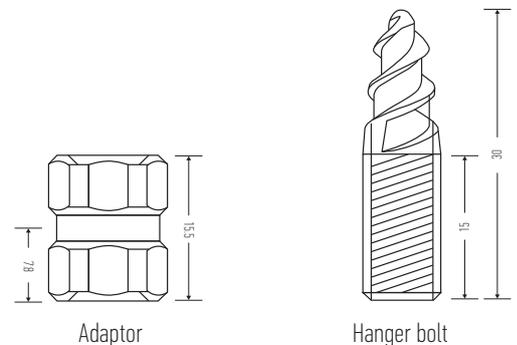

Adaptor

Hanger bolt

Designed and manufactured in New Zealand. For more information, installation templates, and measured drawings of this product and others please visit : www.hallidaybaillie.com or contact your authorized Halliday + Baillie dealer. All information subject to change.