


HB 528

HB 526

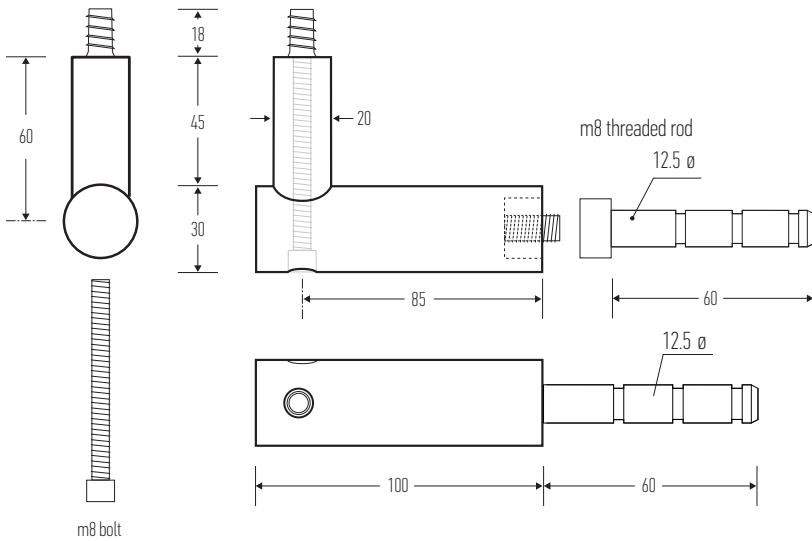

Halliday + Baillie brackets are tested in accordance with both the AS/NZS 1170.1:2002 (Structural Design Actions) standards and the International Building Code, IBC (2003) to comply with the 200lb fall ratings.

Designed and manufactured in New Zealand. For more information, installation templates, and measured drawings of this product and others please visit : www.hallidaybaillie.com or contact your authorized Halliday + Baillie dealer. All information subject to change.

**halliday
baillie**

HB 528 STAINLESS STEEL STAIR RAIL BRACKET TO MATCH HB 526

The Halliday + Baillie HB 528 has been designed to match the HB 526 where provision for electricity through the wall and bracket is required. For the wiring compatible counterpart please see the HB 526 where wiring for LED strip lights is required.

The HB 525 - HB 528 brackets come in both wiring capable and 'blank' versions and are still suitable for use with 40mm to 50mm diameter rails.

Projection from wall (offstand) : 100mm
Overall height (upstand) : 75mm

Includes all fasteners including anchor for concrete, masonry or wood framed plasterboard walls. Epoxy not included. (please contact your local H+ B dealer for further information).

Material : milled 316 marine grade Stainless Steel
Recommended Spacing : 600-800mm

Available in 316 SS only. See finishes sheet for further details.

Glass fixing kits not available for styles HB 525, HB 526, HB 527 and HB 528.

