



**halliday
baillie**

HB 500 STAIR RAIL BRACKET

The Halliday + Baillie HB500 Stair Rail Bracket provides a flexible solution for 1.18-1.96" diameter timber rails.


Suitable for interior or covered exterior situations. For exterior or marine environments, please specify the HB510 bracket in marine grade 316 stainless steel.

Projection from wall (offstand) : 3.27"
Overall height (upstand) : 3.34"

Includes all fasteners. Epoxy required for installation, not included (please contact your local H+B dealer for further information).

Material : non-anodized aluminum alloy
Recommended Spacing : 23-32"

Available in all standard finishes except "BN" Brushed Nickel. See finishes sheet for further details.

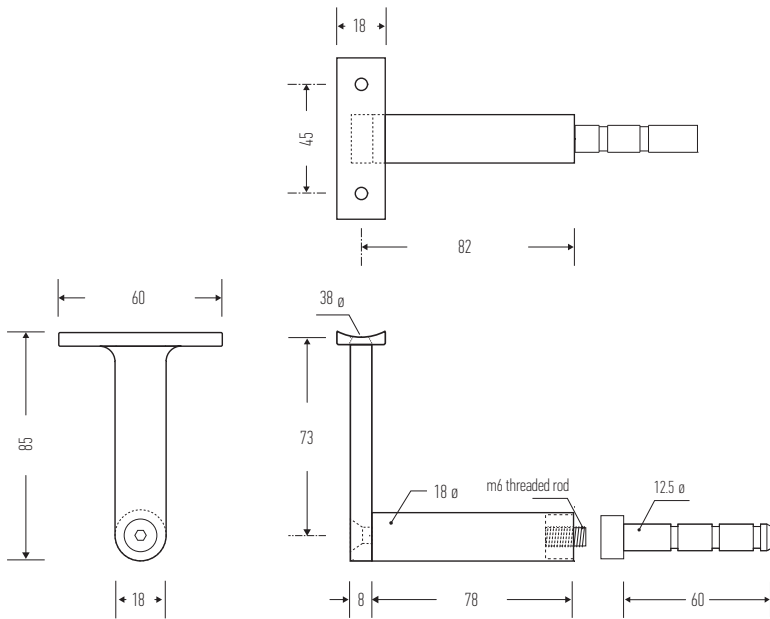


HB 502 GLASS FIXING KIT FOR HB 500 BRACKET

Suitable for 0.39-0.59" glass thickness.

Finishes to match the HB500 Bracket.

Glass fixing kits sold separately (used in conjunction with the bracket, and not as a replacement).

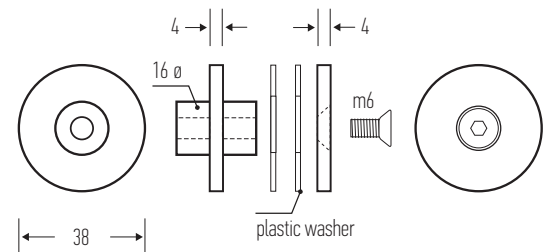

Halliday + Baillie brackets are tested in accordance with both the AS/NZS 1170.1:2002 (Structural Design Actions) standards and the International Building Code, IBC (2003) to comply with the 200lb fall rating.

Designed and manufactured in New Zealand. For more information on this product and others please visit www.hallidaybaillie.com. For dealers in North America, contact Bridgeport Worldwide +1-800-362-1484 www.BridgeportWorldwide.com/hallidaybaillie. All information subject to change.